# **Door Tablet WBX**

Wayfinding Signage - For Common Areas



A compact device that runs on Microsoft Windows, for Door Tablet Wayfinding displays for public areas and touch kiosks.

Part of the Door Tablet WIN family





## Easy to Install

Works "out of the box" with the Door Tablet system. Enables Wayfinding displays, welcome messaging and screensavers to be seen in your communal areas.



#### Slim, Hardened Design

Fits easily behind all displays using the supplied velcro fittings. A robust device that will survive knocks and bangs.



## Remote Management

Manage the Door Tablet WBX remotely using the Door Tablet Web UI.



#### Wired Ethernet or Wi-Fi

Clean installation via two cables, with IEEE 802.11 standard. Wi-Fi connectivity also available, if desired.



## Interactive or Read-Only

Use with the Door Tablet touch and non-touch displays for read-only or interactive Wayfinding.



## **eMMC Storage**

No reason to panic in the event of a sudden power loss as the WBX has 32GB eMMC storage ensuring data is not corrupted.




### Full HD and Multi-Screen

HDMI output ensures a crystal-clear display (up to  $3840 \times 2160$  at 30Hz) and clarity of text. Easily connects to multiple screens via two HDMI outputs.



#### Low-Power System with Intel Processor

A fanless cooling system ensures silent running and ultralow power consumption for ultimate power efficiency. With Intel inside you are assured a reliable system.

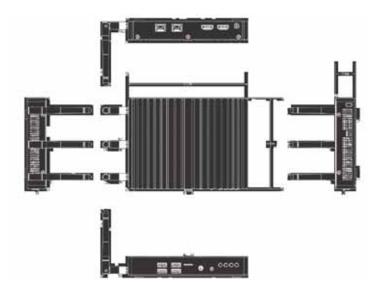









#### **Features**

СРИ	Intel Celeron N3060
Memory	1.35V DDR3L 2GB DDR3L
Storage	32GB eMMC
Orientation display	Landscape/Portrait
Audio codecs	MP3
Networking+	Wired and Wi-Fi

## **Operating Environment**

Туре	Windows 10 Pro
HDMI Output	3840 x 2160 at 30Hz
Resolution	2560 x 1600 at 60Hz
	2560 x 1440 via eDP

#### I/O Interface

Ethernet	RJ45 (10M/100M)
USB	4 x USB 3.0, 1 x Micro-B USB
Analog Stereo out	1
Expansion storage	1 x Full-size Mini-PCle slot
	1 x Half-size Mini-PCle slot

#### Mechanical

Dimensions	140.8 x 107.5 x 27 mm
Weight	570g
Mounting	Surface / Scotched
Housing	Metallic
Environment	Operating Temp: 0 to 40°C
	Operating Humidity: 0 to 90%
Power	DC 19V, 65W/3.42A
Certification	CE/FCC

Server is available for download after registration

Tablet apps are available from Apple, Google and Microsoft Application stores.

Search: door tablet

