

Door Tablet AIO-h

Hardened Workspace Signage Display



Our security hardened purpose-built premium display is placed outside your meeting spaces



Secure

The hardened device prevents rogue admins from installing unauthorized applications via USB ports or recording conversations. Additionally, Wi-Fi and Bluetooth are disabled.



Easy to Install

Works “out of the box” and comes with all the fixtures and fittings needed to get it up where it will be seen. It’s easy to mount on any surface including glass, brick and metal.



LED Lighting on Front and Sides

Bright and colorful LED lights on the front and sides of the Door Tablet AIO-h signal that a room is free or busy and are visible from a distance.



RFID Supports for NFC & HiD

RFID/Mifare/FeliCa/HiD card types enable easy user identification when entering rooms by tapping in and out of meetings. Control who can enter rooms if the door unlocking feature is enabled.



Attractive

It is sleek and slim (3cm deep) with a 10.1” high resolution (1280 x 800 dpi) full color touchscreen; meaning it not only looks good, but the display is easy to read and provides smooth interaction.



Sturdy

The screen is tempered glass which means it is tough, easy to clean and will not shatter, crack or deteriorate excessively with time or heavy use.




Readable at Wide Viewing Angles

The IPS display ensures the screen can be read comfortably at a distance and at wide angles so there’s no need to get up close to read what’s being displayed.



Power over Ethernet (PoE+) Built-in

With no need to rely on Wi-Fi signals, a single PoE+ cable powers the AIO-h giving you the benefit of full power management. Shut down and restart screens as needed. No external power supply available.

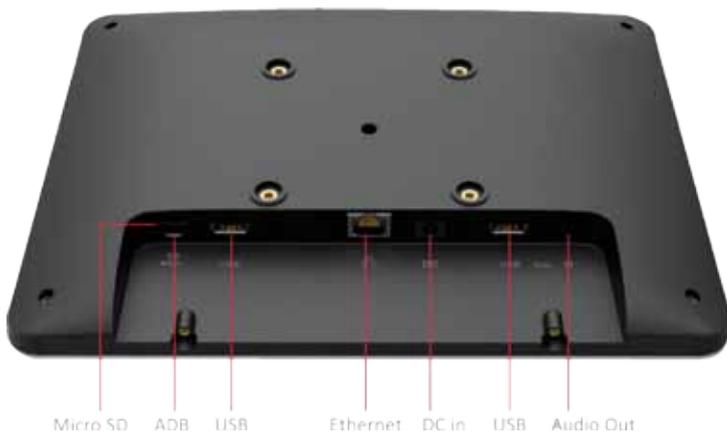

Features

| | |
|---------------------|----------------------|
| CPU | ARM quad-core 1.6GHz |
| Memory | 2GB DDR3 |
| Storage | 8GB eMMC |
| Orientation display | Landscape/Portrait |
| Audio codecs | MP3 |
| Color | Black |
| PoE+ | Yes |

Display

| | |
|---------------------|------------|
| Size | 10.1" |
| Resolution (Max.) | 1280 x 800 |
| Brightness | 300 nits |
| Contrast ratio | 1000 : 1 |
| Viewing angle (H/V) | 178/178 |

I/O Interface

| | |
|-------------------|-----------------|
| Ethernet | RJ45 (10M/100M) |
| USB | Disabled |
| Analog Stereo out | 3.5mm stereo |
| Expansion storage | Micro SDHC slot |
| Speaker | 2W x 2 |

Mechanical

| | |
|-----------------------------|-------------------------------------------------------------------|
| Dimensions without stand | 261.1 x 193.3 x 27mm 10.28" x 7.61" x 1.06" |
| Weight | 710g / 1.56 lbs |
| Mounting | Glass / Surface / Recessed |
| Housing | Plastic |
| Environment | Operating Temp. 0-50°C Humidity: 10 to 85% (non-condensing) |
| Certification | CE/FCC/RoHS |

<https://door-tablet.com> | sales@door-tablet.com

UK: +44 800 910 1131 | USA: +1 407 545 5925

Server and Door Tablet AIO software are available for download after registration

Tablet apps are available from Apple, Google and Microsoft stores.

Search: door tablet

Door Tablet is a trademark of Public.Class Limited. All other trademarks belong to their respective owners.

