

Door Tablet AIO

Workspace Signage Touch Display



Our purpose-built premium display is placed outside your meeting spaces



Easy to Install

Works “out of the box” and comes with all the fixtures and fittings needed to get it up where it will be seen. It’s easy to mount on any surface including glass, brick and metal.



Sturdy

The screen is tempered glass which means it is tough, easy to clean and will not shatter, crack or deteriorate excessively with time or heavy use. It’s built to last and stay looking good.



LED Lighting on Front and Sides

Bright and colorful LED lights on the front and sides of the Door Tablet AIO signal that a room is free or busy and are visible from distance - so there is no need to walk up to a room to see its status.



RFID Supports for NFC & HiD

RFID/Mifare/FeliCa/HiD card types enable easy user identification when entering rooms by tapping in and out of meetings. Administrators can audit room usage and decide who can enter rooms if the door unlocking feature is enabled.



Readable at Wide Viewing Angles

The IPS display ensures the screen can be read comfortably at a distance and at wide angles so there’s no need to get up close to read what’s being displayed.



Attractive

It is sleek and slim (3cm deep) with a 10.1” high resolution (1280 x 800 dpi) full color touchscreen; meaning it not only looks good, but the display is easy to read and provides smooth interaction.




eMMC Storage

The AIO has 8GB eMMC storage. Reliable read/write data settings ensure existing data will not be corrupted when a sudden power loss occurs.



Power over Ethernet (PoE+) Built-in

With no need to rely on Wi-Fi signals, a single PoE+ cable powers the AIO giving you the benefit of full power management, saving costs and the environment. Shut down and restart screens as needed.

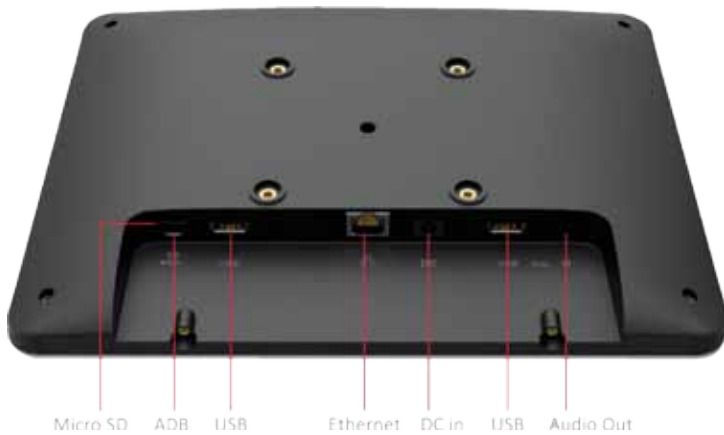

Micro SD ADB USB Ethernet DC in USB Audio Out



Features

CPU	ARM quad-core 1.6GHz
Memory	2GB DDR3
Storage	8GB eMMC
Orientation display	Landscape/Portrait
Audio codecs	MP3
Colors	Black / Silver / White
PoE+	Yes
Bluetooth / Wi-Fi	Yes

Display

Size	10.1"
Resolution (Max.)	1280 x 800
Brightness	300 nits
Contrast ratio	1000 : 1
Viewing angle (H/V)	178/178

I/O Interface

Ethernet	RJ45 (10M/100M)
USB	2x USB2 type / Micro USB
Analog Stereo out	3.5mm stereo
Expansion storage	Micro SDHC slot
Speaker	2W x 2

Mechanical

Dimensions without stand	261.1 x 193.3 x 27mm 10.28" x 7.61" x 1.06"
Weight	710g / 1.56 lbs
Mounting	Glass / Surface / Recessed
Housing	Plastic
Environment	Operating Temp. 0-50°C Humidity: 10 to 85% (non-condensing)
Power	DC 12V, 1.5A
Certification	CE/FCC/RoHS

<https://door-tablet.com> | sales@door-tablet.com

UK: +44 800 910 1131 | USA: +1 407 545 5925

Server and Door Tablet AIO software are available for download after registration

Tablet apps are available from Apple, Google and Microsoft stores.

Search: door tablet

Door Tablet is a trademark of Public.Class Limited. All other trademarks belong to their respective owners.

